



FACTORY PRESETS

DF3200DSP Amplifier


FULL RANGE	2 SAT+2 SUB 100 Hz	SUB + SAT 100 Hz	SUB + SAT 125 Hz	DSP PRESET	2 SUB+2 SAT 100 Hz	2 SUB+2 SAT 125 Hz	2 SAT+2 SUB 125 Hz	2-WAY
								
000	001	010	011		100	101	110	111

Preset 000 «Full Range»

Speaker Outputs	Ch 1	Function: Full Range Routing: Input Ch1 (gain 0dB) HPF Freq.: 35 Hz (BTW 24dB/oct)
	Ch 2	Function: Full Range Routing: Input Ch 2 (gain 0dB) HPF Freq.: 35 Hz (BTW 24dB/oct)
Line Outputs	Output A	Function: Full Range Routing: Input Ch1 (gain 0dB) HPF Freq.: 35 Hz (BTW 24dB/oct)
	Output B	Function: Full Range Routing: Input Ch 2 (gain 0dB) HPF Freq.: 35 Hz (BTW 24dB/oct)

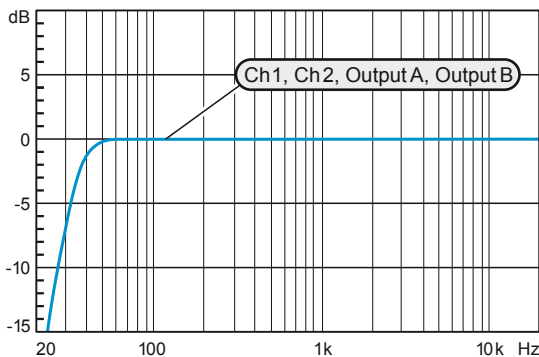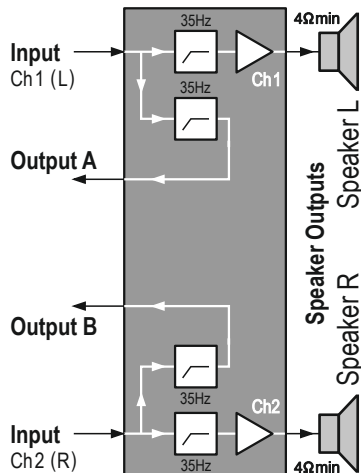

To Full Range Speakers
Speaker R Speaker L

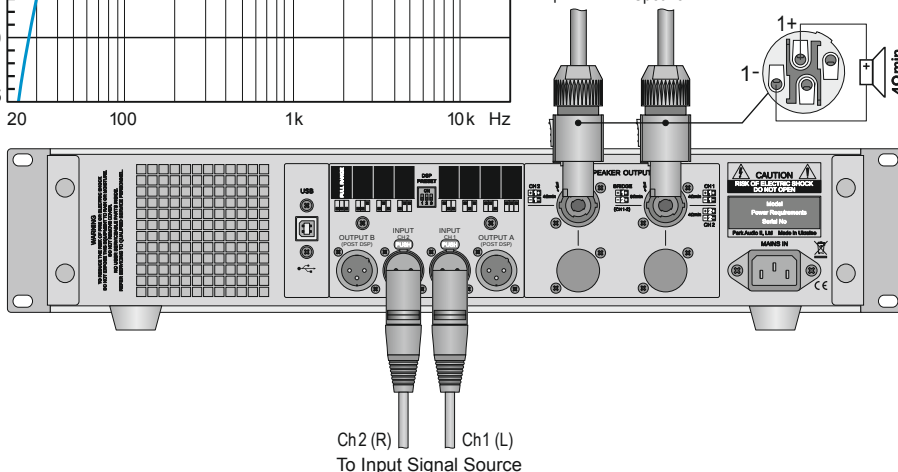

Preset 001

«2 Subwoofer + 2 Satellite (100 Hz)»

Speaker Outputs	Ch1	Function Routing HPF Freq. LPF Freq.	Subwoofer Left Input Ch1 (gain +3 dB) 35 Hz (BTW 24dB/oct) 100 Hz (LR 24dB/oct)
	Ch2	Function Routing HPF Freq. LPF Freq.	Subwoofer Right Input Ch2 (gain +3 dB) 35 Hz (BTW 24dB/oct) 100 Hz (LR 24dB/oct)
Line Outputs	Output A	Function Routing HPF Freq.	Satellite Left Input Ch1 (gain 0 dB) 100 Hz (LR 24dB/oct)
	Output B	Function Routing HPF Freq.	Satellite Right Input Ch2 (gain 0 dB) 100 Hz (LR 24dB/oct)

Input Ch1 (L)

To Sat L

Output A

Output B To sat R

Input Ch2 (R)

100Hz

35Hz

100Hz

100Hz

35Hz

100Hz

Ch1

Ch2



4Ω min

4Ω min

Sub L

Sub R

Speaker Outputs

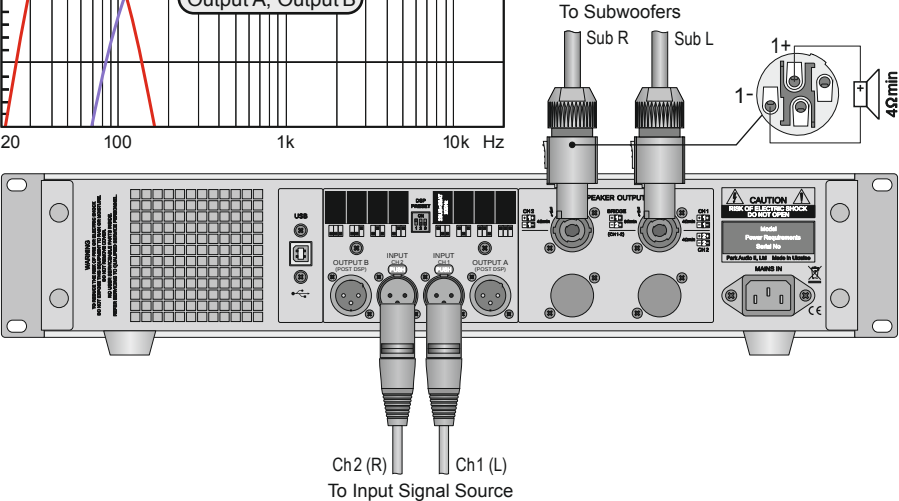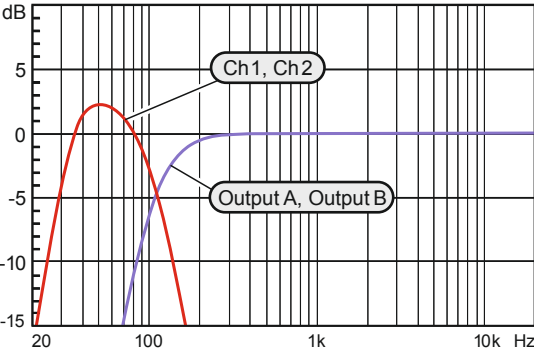

Preset 010

«Subwoofer + Satellite (100Hz)»

Speaker Outputs	Ch 1	Function Routing HPF Freq. LPF Freq.	Subwoofer Input Ch 1 (gain +3 dB) 35 Hz (BTW 24dB/oct) 100 Hz (LR 24 dB/oct)
	Ch 2	Function Routing HPF Freq.	Satellite Input Ch 1 (gain 0 dB) 100 Hz (LR 24 dB/oct)
Line Outputs	Output A	Function Routing HPF Freq.	Full Range Input Ch 1 (gain 0dB) 35 Hz (BTW 24dB/oct)
	Output B	Function Routing HPF Freq.	Full Range Input Ch 2 (gain 0dB) 35 Hz (BTW 24dB/oct)

Input Ch 1

100Hz

35Hz

100Hz

35Hz

Input Ch 2

35Hz

Ch 1

Ch 2

Output A

Output B



4Ω min

4Ω min

Speaker Outputs

Sat

Sub

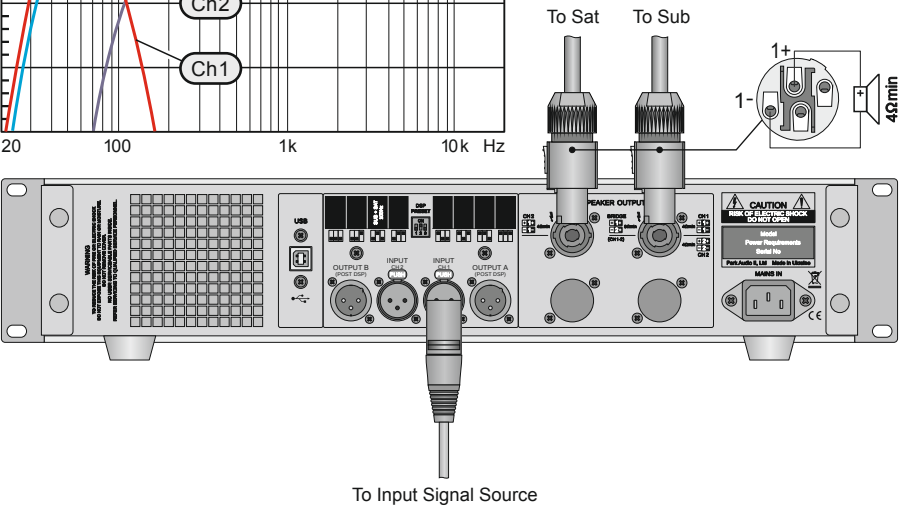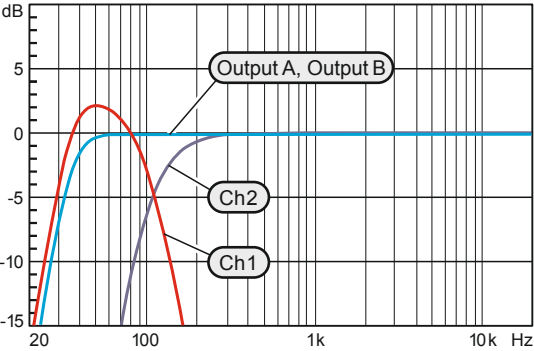

Preset 011

«Subwoofer + Satellite (125 Hz)»

Speaker Outputs	Ch1	Function Routing HPF Freq. LPF Freq.	Subwoofer Input Ch1 (gain +3 dB) 35 Hz (BTW 24dB/oct) 125 Hz (LR 24 dB/oct)
	Ch2	Function Routing HPF Freq.	Satellite Input Ch1 (gain 0 dB) 125 Hz (LR 24 dB/oct)
Line Outputs	Output A	Function Routing HPF Freq.	Full Range Input Ch1 (gain 0dB) 35 Hz (BTW 24dB/oct)
	Output B	Function Routing HPF Freq.	Full Range Input Ch2 (gain 0dB) 35 Hz (BTW 24dB/oct)

Input Ch1

125Hz

35Hz

125Hz

35Hz

Input Ch2

35Hz

Ch1

Ch2

Output A

Output B



4Ω min

Sub

4Ω min




Sat

Speaker Outputs

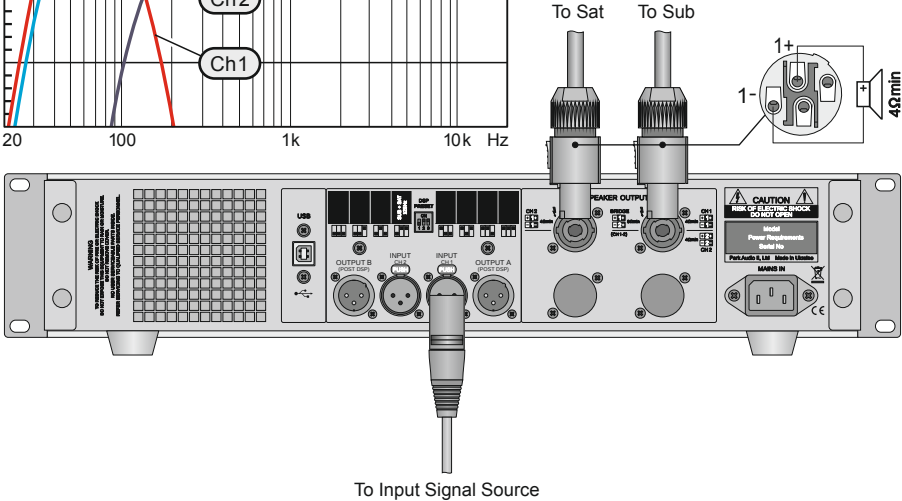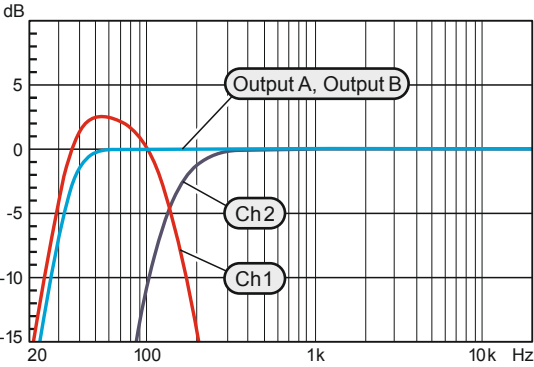




Preset 100 «2 Subwoofer + 2 Satellite (100 Hz)»

Speaker Outputs	Ch 1	Function Routing HPF Freq. LPF Freq.	Subwoofer Left Input Ch 1 (gain +3 dB) 35 Hz (BTW 24 dB/oct) 100 Hz (LR 24 dB/oct)
	Ch 2	Function Routing HPF Freq. LPF Freq.	Subwoofer Right Input Ch 2 (gain +3 dB) 35 Hz (BTW 24 dB/oct) 100 Hz (LR 24 dB/oct)
Line Outputs	Output A	Function Routing HPF Freq.	Satellite Left Input Ch 1 (gain 0 dB) 100 Hz (LR 24 dB/oct)
	Output B	Function Routing HPF Freq.	Satellite Right Input Ch 2 (gain 0 dB) 100 Hz (LR 24 dB/oct)

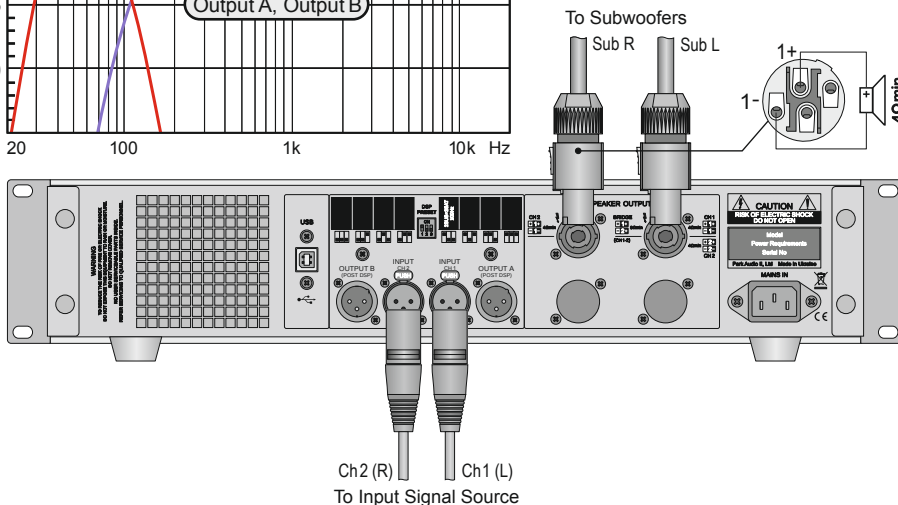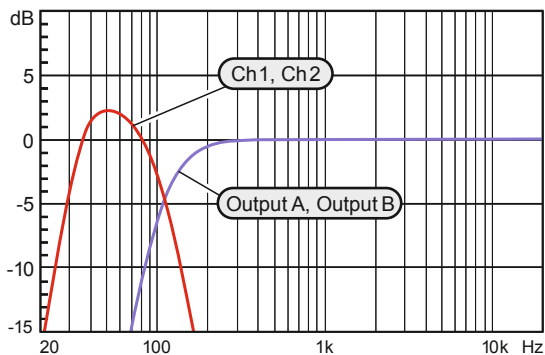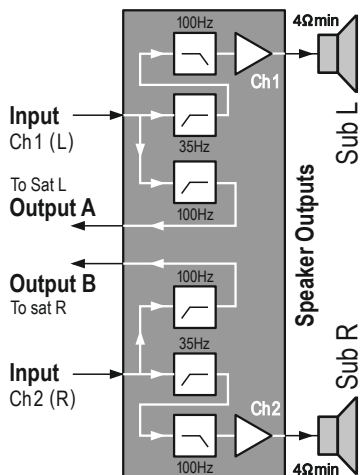




Preset 101 «2 Subwoofer + 2 Satellite (125 Hz)»

Speaker Outputs	Ch1	Function Routing HPF Freq. LPF Freq.	Subwoofer Left Input Ch1 (gain +3 dB) 35 Hz (BTW 24dB/oct) 125Hz (LR 24 dB/oct)
	Ch2	Function Routing HPF Freq. LPF Freq.	Subwoofer Right Input Ch2 (gain +3 dB) 35 Hz (BTW 24dB/oct) 125Hz (LR 24 dB/oct)
Line Outputs	Output A	Function Routing HPF Freq.	Satellite Left Input Ch1 (gain 0 dB) 125 Hz (LR 24 dB/oct)
	Output B	Function Routing HPF Freq.	Satellite Right Input Ch2 (gain 0 dB) 125 Hz (LR 24 dB/oct)

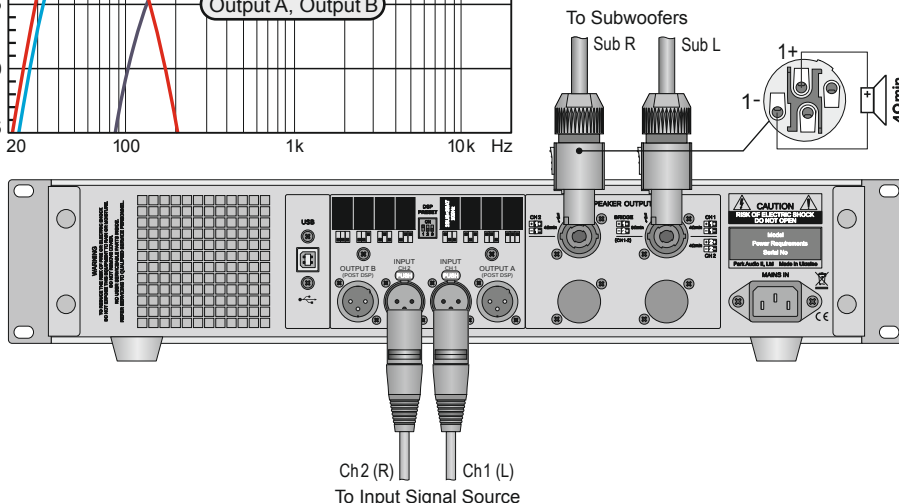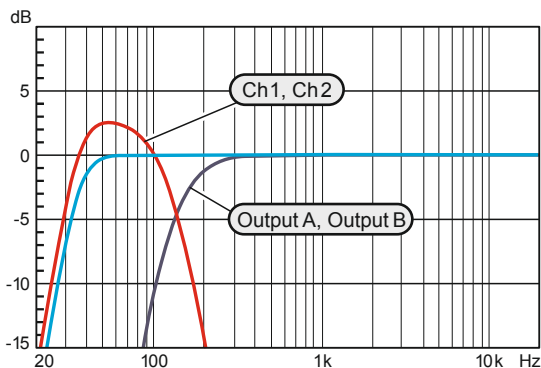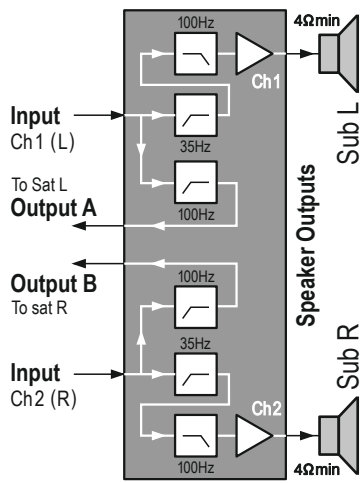

Preset 110

«2 Satellite + 2 Subwoofer (125 Hz)»


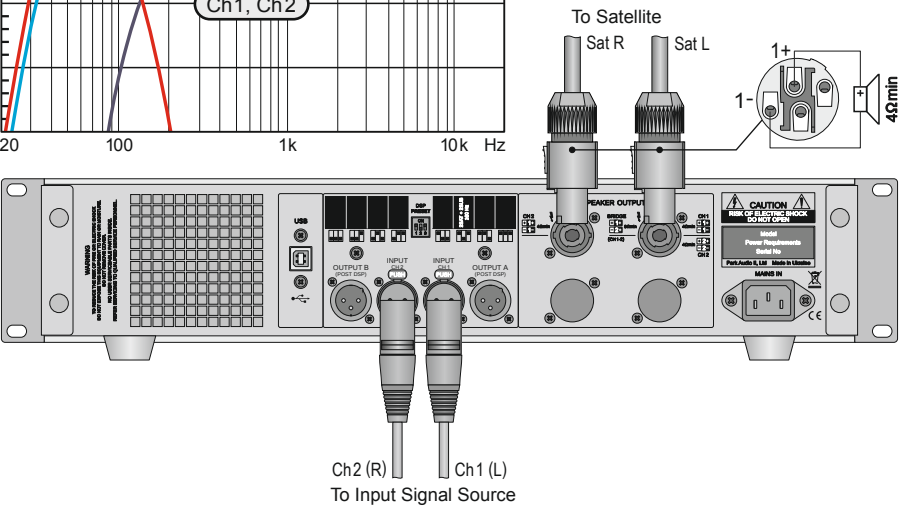
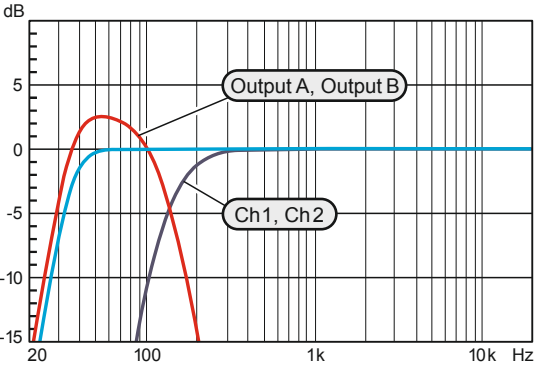
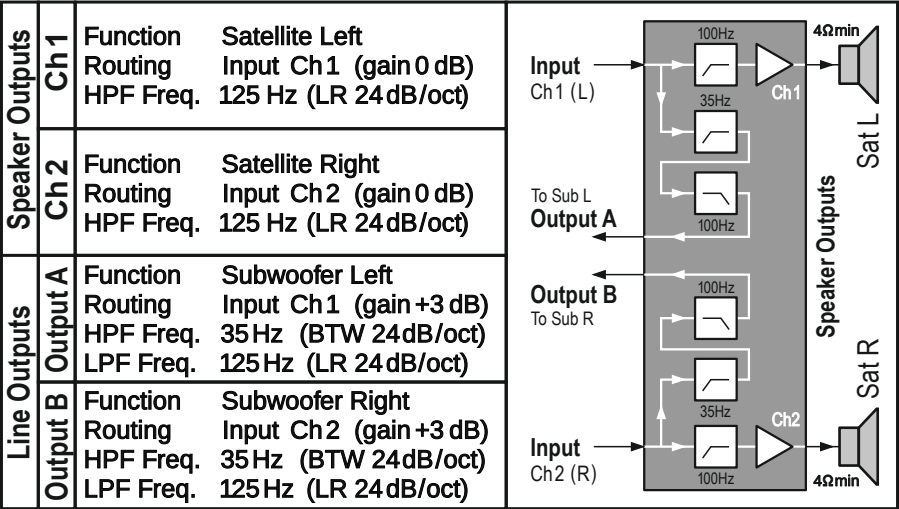


Preset 111



«2-Way»

Speaker Outputs	Ch1	Function Routing HPF Freq. LPF Freq.	Low Band Input Ch1 (gain 0dB) 35 Hz (BTW 24dB/oct) 1200 Hz (LR 24dB/oct)
	Ch2	Function Routing HPF Freq.	High Band Input Ch1 (gain 0 dB) 1200 Hz (LR 24 dB/oct)
Line Outputs	Output A	Function Routing HPF Freq.	Full Range Input Ch1 (gain 0dB) 35 Hz (BTW 24dB/oct)
	Output B	Function Routing HPF Freq.	Full Range Input Ch2 (gain 0dB) 35 Hz (BTW 24dB/oct)

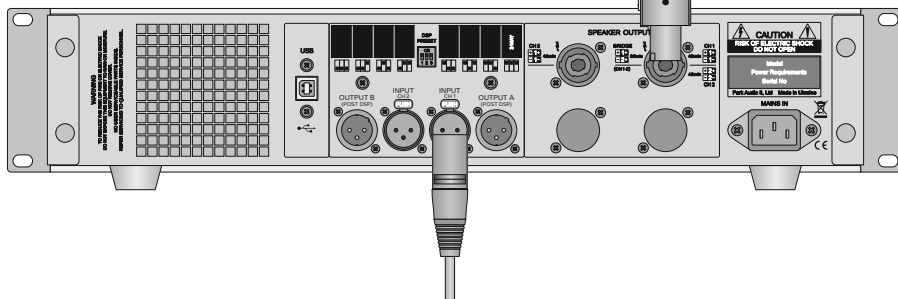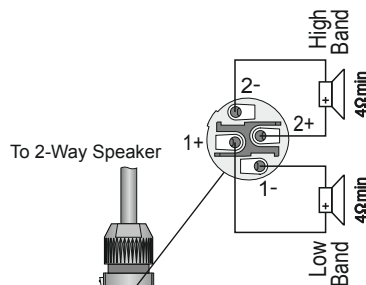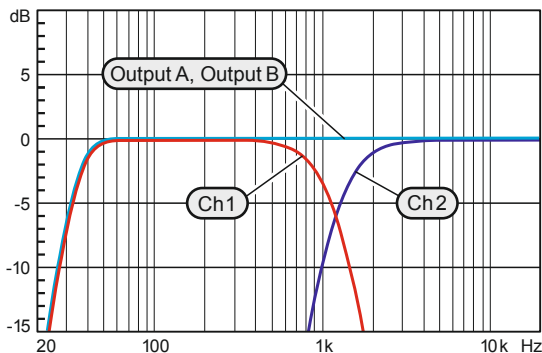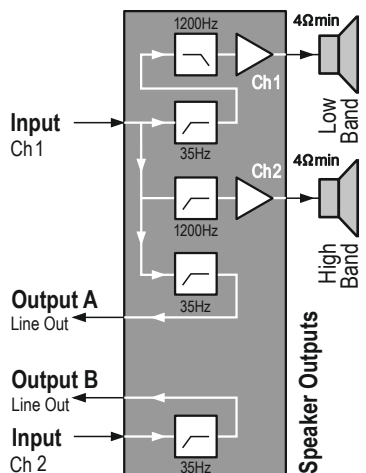

To Input Signal Source