



DX1400SE

DX-Series Built-in Amplifiers for PA Speaker Systems



- D class power amplifier
- Switching power supply
- Power factor corrector (optional)
- Forced cooling system
- Detachable power cord
- Analog input section, acting as high pass filter, EQ, limiting and speaker overload protection
- Line inputs – 2 x 1/4" JACK
- Microphone input – Combo XLR-1/4" JACK
- Output for passive loudspeaker – SPEAKON
- Line input level control
- Line input three-way EQ
- Microphone gain control
- Microphone input level control
- Microphone input three-way EQ
- Overload and short-circuit protection
- DC output protection
- Thermal protection
- High frequency protection
- Soft signal start

BUILT-IN AMPLIFIER

Application:

Built-in amplifier for use in stereo sets, composed of active loudspeaker with 2-channels amplifier and passive loudspeakers.


Power Rating *	2 x 700/380 W (4/8 Ohms)
Frequency Range **	45 Hz – 20 kHz
Total Harmonic Distortions	<0.05%
Slew Rate	20 V/μs
Damping Factor	200 (200 Hz, 8 Ohms)
Signal-to-Noise Ratio:	
– line input	98 dB (unweighted)
– mic input	94 dB (unweighted)
Sensitivity **: 	
– line input	775mV
– mic input	3 - 200 mV
Line Input EQ Section:	
– LOW, HIGH	±15 dB
– MID	±12 dB
Mic Input EQ Section:	
– LOW, HIGH	±15 dB
– MID	±12 dB
High Pass Filter Cutoff Frequency **	45 Hz
Power Requirements	~230 V, 50/60 Hz
Weight:	
– DX1400SE	4 kg
– DX1400SE PFC	4.3 kg
Dimensions	198 mm x 408 mm x 104 mm

Notes.

- * For mains voltage:
 - ~230 V for amps without PFC;
 - ~160-280V for amps with PFC.

** Basic model.

AMPLIFIER BLOCK DIAGRAM

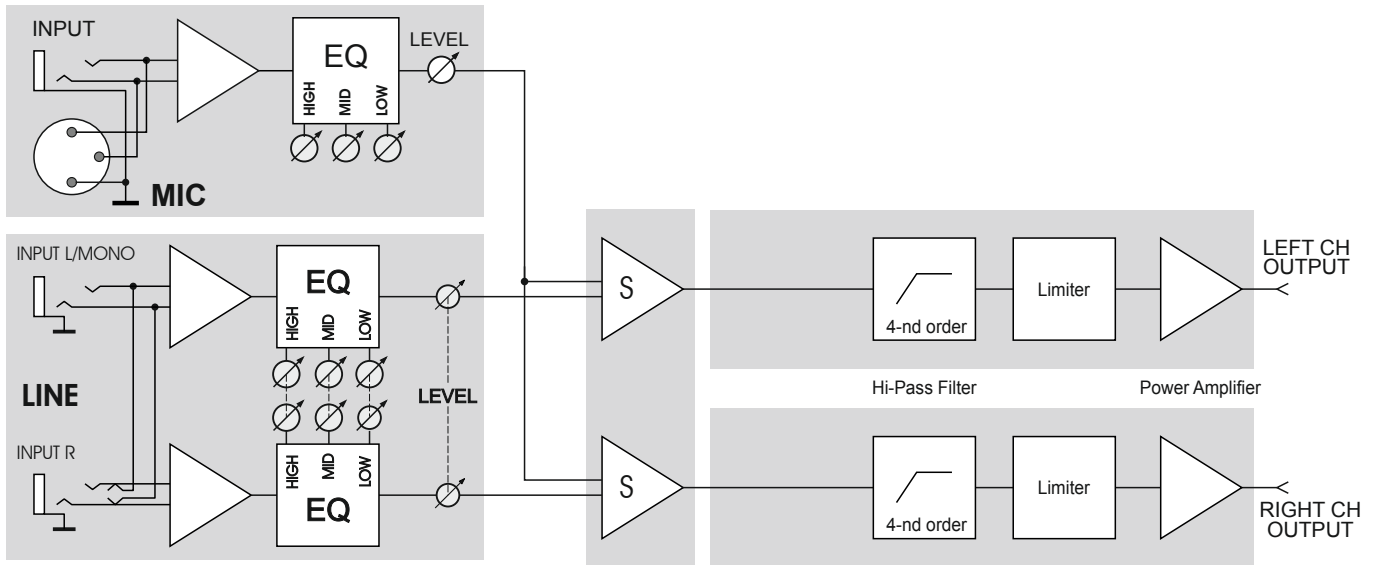

MECHANICAL DRAWING

