




VA401i

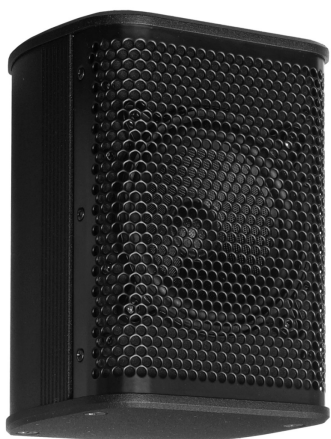

The compact installation loudspeaker **VA401i** is based on 4" full-range speaker. Such loudspeakers has high linear phase response, which together with their very low harmonic distortion gives very clear sound reproduction in a vocal range.

Excellent performance, compact size and reliable mounting system allow using the loudspeaker for various applications. The system can be easily integrated into practically any room. The sound can be precisely targeted to the required areas by means of universal mounting bracket.

The loudspeaker cabinet is made of metals: the side wall are made of aluminum profile, rear panel and front grid - of steel. The cabinet coating is black paint with powder finish. The enclosure can also be custom painted to match specific color schemes.

The input signal is connected via 4-pins Euroblock plug, located on the rear panel.



Compact Installation Loudspeaker

Compact size

Low-profile metal cabinet

4" full-range speaker (FaitalPRO)

Convenient universal bracket for loudspeaker mounting

Application:

*Fill and spot coverage for systems with space limitations and visibility concerns.
High-quality distributed systems in clubs and restaurants for paging and music.
Small, portable systems for corporate AV.
Sound installations for gallery exhibits and museum displays.*

TECHNICAL DATA

Configuration and Acoustic Design

Full-range Loudspeaker, Sealed Box


Transducer

4" dia full range speaker

Specification

Power Handling (nom./ contin.)	30/60 W
Impedance	16 or 8 or 4 Ohms
Frequency Range	115 Hz – 17 kHz
Coverage	130°H x 130°V
Sensitivity	90 dB (1 W, 1 m)
Max. Output SPL:	
– continuous	105 dB / 1 m
– peak	111 dB / 1 m
Weight	1.7 kg
Dimensions	124 (W) x 169 (H) x 114 (D) mm

VA401i Frequency Response (processed)

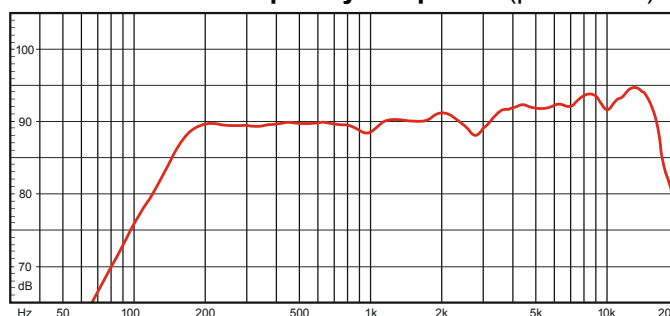

Recommended PEQ:

Freq: 480 Hz Q: 1 Gain: +3 dB

Freq: 1700 Hz Q: 2 Gain: -2 dB

Freq: 8800 Hz Q: 2 Gain: -7 dB

