



ND 115

SUBWOOFER

Application:

PA systems for clubs, bars, restaurants, music bands, indoor and outdoor usage.

TECHNICAL DATA

Acoustic Design

Rectangular cabinet, bass reflex.


LF Driver:

15" dia B&C SPEAKERS, voice coil 3"

Specifications

Power Handling (nominal)	500 W
Power Handling (continuous)	1000 W
Nominal Impedance	4 or 8 Ohm
Frequency Range	43-350 Hz
Sensitivity	95 dB(1 W, 1 m)
Maximum Output SPL (full space):	
– continuous	125 dB/1 m
– peak	131 dB/1 m
Weight	24 kg
Dimensions :	
– width	580 mm
– height	445 mm
– depth	510 mm
Connector	SpeakON

ND115 Frequency Response

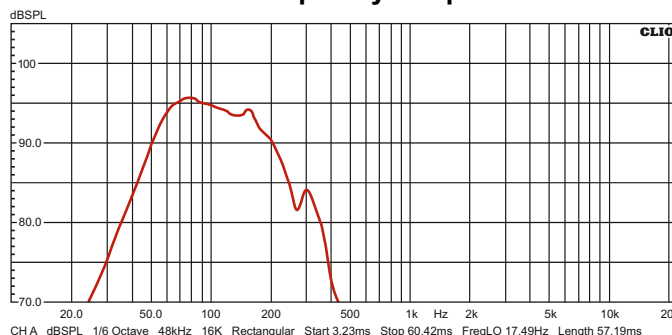

Portable series



Subwoofer **ND115** is a passive subwoofer, designed for professional use in various areas.

The subwoofer is based on 15" woofer (B&C Speakers, Italy), installed into the front panel of the cabinet. The front panel of the loudspeaker is covered with a decorative protective steel grid. Additional protection against moisture is provided by acoustically transparent foam, glued to the inner surface of the grid.

Acoustic design - bass reflex. The bass reflex ports are located in two lower corners of the front panel. The optimal combination of compact dimensions and careful setting of bass reflex ports provide smooth frequency response.

The rectangular cabinet is made of birch plywood with black water-polymer coating (other colors available).

Two ergonomic handles for carrying are located on both sides. The flange for speaker stand is located on the top of the subwoofer.

Subwoofer connection is performed via **SpeakOn**.